


ADJUSTABLE SPREAD TELESCOPING BEAMS

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Spreader Beams shipped with proof load certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Standard with swivel latch hooks. Top rigging not included - please call for pricing
- Made in U.S.A.
- Custom designs available - call for engineering.

- Minimum horizontal top rigging angle of 45°.
- Ideally suited for adding stability to critical lifts.

Prop 65 – See Page 100

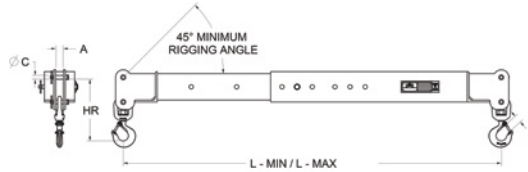

SHOWN WITH OPTIONAL TOP RIGGING

TELESCOPING ADJUSTABLE SPREADER BEAMS						
Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*				A (in) C (in) E (in)
		Min Max 4 - 6	Min Max 6 - 10	Min Max 8 - 14	Min Max 12 - 20	
4,000	Part Number	12805	12822	12813	12829	1.00
	HR =	5.37	5.12	5.12	5.12	0.50
	LBS =	80	120	155	235	0.89
10,000	Part Number	12834	12842	12848	12853	1.25
	HR =	6.53	6.28	6.28	6.28	0.75
	LBS =	130	190	250	365	1.08
20,000	Part Number	12864	12872	12880	12885	1.66
	HR =	7.63	7.63	7.63	7.63	1.00
	LBS =	185	265	345	510	1.31

OPTIONAL TOP RIGGING					
Working Load Limit in Pounds*	Part Name	Part Number	Part Number	Part Number	Part Number
4,000	Adjustable Spreader	12805	12822	12813	12829
	Chain	23354	23355	23356	23357
	Wire Rope	23396	23397	23398	23399
	Round Sling Bridle	23374	23375	23376	23377
10,000	Adjustable Spreader	12834	12842	12848	12853
	Chain	23378	23379	23380	23381
	Wire Rope	23400	23401	23402	23403
	Round Sling Bridle	23382	23383	23384	23385
20,000	Adjustable Spreader	12864	12872	12880	12885
	Chain	23386	23387	23388	23389
	Wire Rope	23404	23405	23406	23407
	Round Sling Bridle	23390	23391	23392	23393


*Minimum horizontal top rigging angle is 45° on all fixed and adjustable spreaders. M&W recommends a minimum horizontal top rigging angle of 60°. Adjustable on 1" increments.

SPREADER BEAMS

Telescoping Adjustable

ADJUSTABLE SPREAD TELESCOPING BEAMS - LARGE CAPACITY SHACKLE END

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- ALL Spreader Beams shipped with proof load certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom designs available - call for engineering.
- ALL lifting equipment individually proof loaded per OSHA requirements.
- Minimum horizontal top rigging angle of 45°
- Ideally suited for adding stability to critical lifts.
- Beam only. Shackles supplied by others.

 Prop 65 – See Page 100



SHOWN WITH OPTIONAL TOP RIGGING & SHACKLES

TELESCOPING ADJUSTABLE LARGE CAPACITY SHACKLE END SPREADER BEAMS						
Working Load Limit in Pounds*	Shackle Size	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*			
			Min Max 5'6" - 7'	Min Max 7 - 10	Min Max 10 - 14	Min Max 14 - 20
40,000	1-1/2" Top 1-1/2" Bottom	Part Number	20127	20126	20125	20124
		HR =	7.6	7.6	7.6	7.6
		LBS =	340	410	560	760
60,000	1-3/4" Top 1-3/4" Bottom	Part Number	20132	20131	20130	20129
		HR =	7.1	7.1	7.1	7.1
		LBS =	395	490	660	890
80,000	2" Top 2" Bottom	Part Number	20137	20136	20135	20134
		HR =	9.3	9.3	9.3	9.3
		LBS =	575	700	950	1,250
100,000	2" Top 2" Bottom	Part Number	20142	20141	20140	20139
		HR =	9.3	9.3	9.3	9.3
		LBS =	575	700	950	1,250

OPTIONAL TOP RIGGING						
Working Load Limit in Pounds*	Part Name		Part Number	Part Number	Part Number	Part Number
40,000	Adjustable Spreader		20127	20126	20125	20124
	Wire Rope		23421	23422	23423	23424
	Round Sling Bridle		23433	23434	23435	23436
60,000	Adjustable Spreader		20132	20131	20130	20129
	Wire Rope		23425	23426	23427	23428
	Round Sling Bridle		23437	23438	23439	23440
80,000	Adjustable Spreader		20137	20136	20135	20134
	Wire Rope		23430	23430	23431	23432
	Round Sling Bridle		23441	23442	23443	23444
100,000	Adjustable Spreader		20142	20141	20140	20139
	Wire Rope		23430	23430	23431	23432
	Round Sling Bridle		23441	23442	23443	23444

*Minimum horizontal top rigging angle is 45° on all fixed and adjustable spreaders. M&W recommends a minimum horizontal top rigging angle of 60°. Adjustable on 6" increments.